


# CONVERT YOUR OR202 REMOTE TO A VANDAL-RESISTANT REMOTE BY ADDING OUR CP202SS COVER PLATE

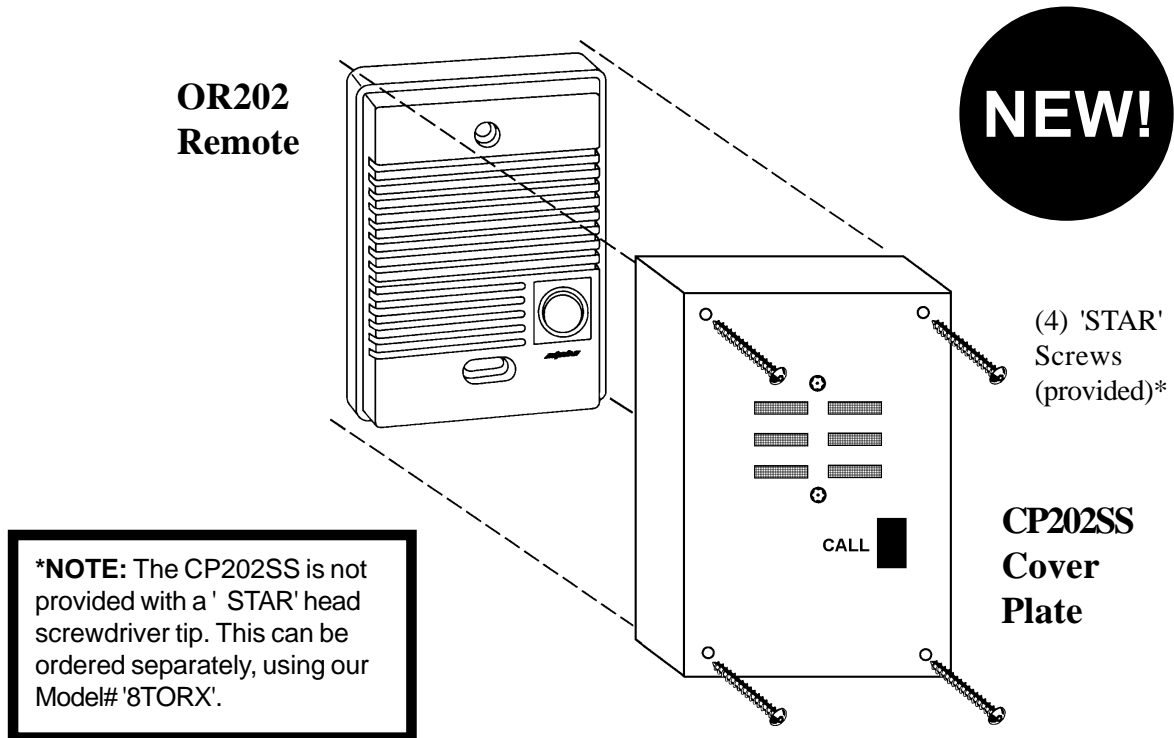

## IMPORTANT INFORMATION AND RESTRICTIONS:

1. **The CP202SS cover plate can only be used on our model OR202 remote station.**
2. **It may be possible to use the CP202SS with another manufacturer's remote station. However, any such use is strictly at the customer's risk. Any modifications made to the CP202SS to fit another manufacturer's remote station is at the customer's risk, and voids all warranties either express or implied.**

## INSTALLATION GUIDELINES and GENERAL INFORMATION:

1. Remove any tape holding the "CALL" button in place. Make sure that there is no sticky residue on the back of the "CALL" button before installing the OR202 inside.
2. Place one of the large washers supplied onto each mounting post inside the CP202SS cover plate. These washers must be installed before the OR202 remote is placed inside the CP202SS unit.
3. Install the OR202 remote inside of the CP202SS, making sure that the "CALL" button is installed into the CP202SS properly.
4. Use the two (2) hexagonal nuts provided to secure the OR202 remote to the mounting posts inside the CP202SS cover plate. **NO NOT OVER-TIGHTEN** the nuts, as this could cause damage to the OR202 remote station. Make sure the "CALL" button operates easily and without jamming.
5. Screw the entire assembly to the finished wall using the four (4) 'STAR' security screws provided, or by using screws of your own choice.



42 Central Drive, Farmingdale NY 11735-1202  
(631) 777-5500 Fax: (631) 777-5599  
**TOLL-FREE Tech Support 1-800-666-4800**  
Email: info@alpha-comm.com

## MODEL CP202SS COVER PLATE INSTALLATION INSTRUCTIONS

For use with the OR202 Duo-Com™ Remote Intercom Station