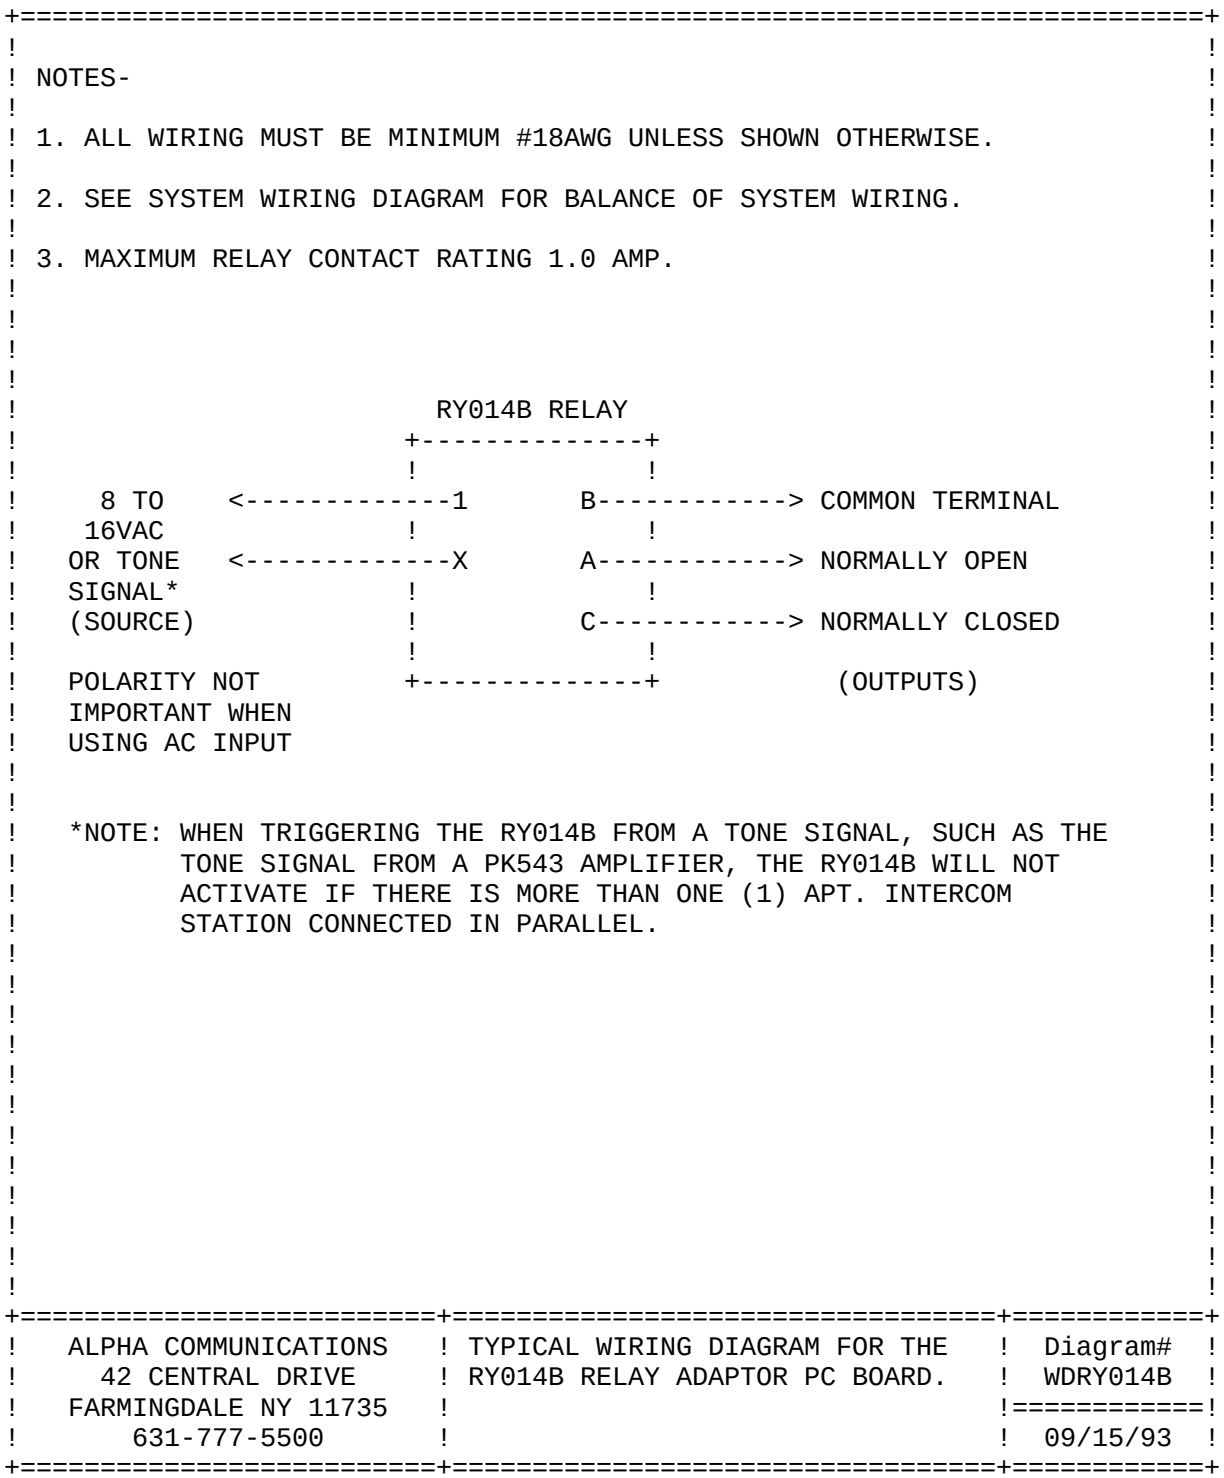
NOTES-
1. ALL WIRING MUST BE MINIMUM #18AWG UNLESS SHOWN OTHERWISE.
2. SEE SYSTEM WIRING DIAGRAM FOR BALANCE OF SYSTEM WIRING.
3. MAXIMUM RELAY CONTACT RATING 1.0 AMP.
RY014B RELAY
8 TO 16VAC OR TONE SIGNAL* (SOURCE)
POLARITY NOT IMPORTANT WHEN USING AC INPUT
1
X
B
A
C
COMMON TERMINAL
NORMALLY OPEN
NORMALLY CLOSED
(OUTPUTS)
*NOTE: WHEN TRIGGERING THE RY014B FROM A TONE SIGNAL, SUCH AS THE TONE SIGNAL FROM A PK543 AMPLIFIER, THE RY014B WILL NOT ACTIVATE IF THERE IS MORE THAN ONE (1) APT. INTERCOM STATION CONNECTED IN PARALLEL.
ALPHA COMMUNICATIONS
42 CENTRAL DRIVE
FARMINGDALE NY 11735
631-777-5500
TYPICAL WIRING DIAGRAM FOR THE RY014B RELAY ADAPTOR PC BOARD.
Diagram# WDRY014B
09/15/93